The Model 68 is an automatic draining, freezeless wall hydrant with hose connection Backflow Protection and a unique, integral, locking head cover. The UNDERCOVER WALL HYDRANT® is intended for irrigation purposes and is designed to blend in with modern architecture for installation on restaurants, schools, office buildings, churches, apartments, motels, stores, shopping centers and industrial buildings.

# **Hydrant Specifications:**

ASSE 1053 listed hydrant



Includes ASSE 1052 Double Check Backflow

Preventer



- For both backflow and backsiphonage protection
- Field testable
- No spray back

# Finishes/Materials:

Standard: Chrome plated brass head with stainless steel cover

Option: Brass head with stainless steel cover

## Features:

- · Automatically drains even with hose attached
- Uses solid 3/8" brass operating rod
- Contains Hardened 3/8" stainless steel operating stem
- One piece plunger controls flow and drain function
- Dual copper casing tubes w/built-in slope
- Works with pressures up to 125 p.s.i.
- Maximum Temperature: 120° F
- Brass head with integral, locking stainless steel cover to protect against unauthorized use
- · Head cover flips down and out of the way for unobstructed hydrant operation
- Head cover is replaceable without removing
- Tee Key operation for hydrant and door lock
- Easier to install than standard recessed box hydrant
- Wall Clamp included
  - For Irrigation and Outdoor Watering
  - Not Intended For Continuous Use



The Model 68 is sold with a limited warranty for five years against defects in material and workmanship. We will replace or issue credit (at our option) for defective goods that are returned for inspection and found to be defective within five years of purchase from Woodford.

## Specify: Undercover Wall Hydrant®


Wall Hydrant shall be ASSE 1053 listed Woodford Model 68, automatic draining, even if the hose is left on. ASSE Standard 1052 approved field testable double check backflow preventer. Hardened stainless steel operating stem, 3/8" solid brass operating rod with one piece plunger to control both the flow and drain function and requires no special tools for removal. Flat face plate shall be one piece solid brass for a permanent wall seal. Loose key and wall clamp to be furnished with each hydrant.


# Freezeless



# UNDERCOVER WALL HYDRANT® Model 68






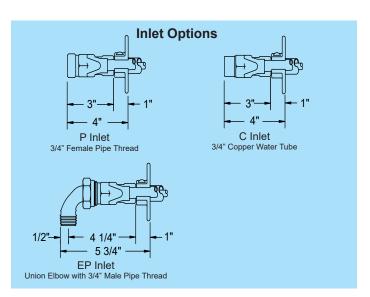

SEE WOODFORDMFG.COM FOR INSTRUCTIONS AND DETAILS OF APPLICABLE PATENTS AND PATENTS PENDING OR CALL 1-800-621-6032

When ordering, specify model, inlet and wall thickness


©2025 WOODFORD Mfg. Rev 08/25 Form No 68 105

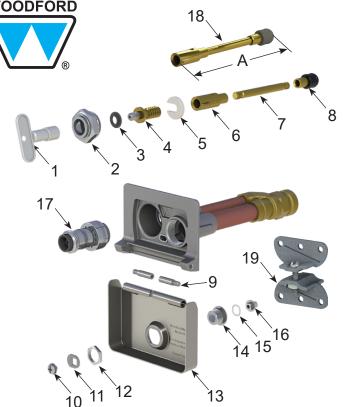

# **MODEL 68 PARTS LIST**

WODEL OF FACTS LIST						
ITEM	PART #	DESCRIPTION				
1	50009	Tee Key				
2	50264	Head Nut – CH chrome				
	50265	Head Nut – BR brass				
3	50252	Stem Washer				
4	55062	Stem Screw				
5	50251	"C" washer				
6	51014	Yoke Nut				
7	Operating Rod (Sold As Item 18 Only)					
8	50250	Plunger				
9	50041	Headless Shoulder Bolt (2)				
10	30150	Cam Lock Cam Screw				
11	30143	Cam Lock				
12	30155	Cam Lock Hex Nut				
13	50280	Stainless Steel Head Cover				
14	30140	Tee Key Lock Well				
15	30156	Tee Key Lock Disc Spring				
16	30139	Tee Key Lock				
17	50HA-CH	50HA Backflow Preventer-chrome				
	50HA-BR	50HA Backflow Preventer-brass				
18	554XX	Operating Rod Assembly (Includes Items 6,7,8)				
	(Select requ	ired assembled length from table below)				
19	55063	Wall Clamp Assembly				
	RK-65	Chrome Repair Kit (Includes Items 1-6 & 8)				
	RK-68DR	Door Repair Kit (Includes Items 9-16)				

	Operating Rod Assy. "A"						
	Wall Thickness	Length	Part No.				
	CC	3 ½"	55401				
	4	6 ½"	55404				
	6	8 ½"	55406				
	8	10 ½"	55408				
	10	12 ½"	55410				
12 14		14 ½"	55412				
		16 ½"	55414				
	16	18 ½"	55416				
	18	20 ½"	55418				
	20	22 ½"	55420				
	22	24 ½"	55422				
	24	26 ½"	55424				



**Head Casting Dimensions (Open Cover)** 



# Front Rear 5" 3 1/2" 3 3/8"

Wall Thickness (Inch)	CC	4	6	8	10	12	14	16	18	20	22	24
Overall Length - Hydrant	5	8	10	12	14	16	18	20	22	24	26	28
Shipping Wt. (Lbs)	2.5	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1

NOTE: Close Coupled Models are not recommended for use in freezing climates and cannot use wall clamp.

# For more information contact...

# WOODFORD MANUFACTURING COMPANY, LLC

2121 Waynoka Road, Colorado Springs, Colorado 80915 • Phone: (800) 621-6032

To view our complete product line visit: www.woodfordmfg.com or email: sales@woodfordmfg.com

©2025 WOODFORD Mfg. Rev. 08/25 Form No. 68.105